


The Leveler Kit is an supportive feature used to prevent tipping from occurring when stepping onto the trailer while off the hitch.

Parts List

| Description | Qty |
|--------------------------|-----|
| Jack | 2 |
| 5/16 - 18X1 HexCap Screw | 4 |
| 5/16 - 8 Nylocks | 4 |
| 5/16 USS Flat Washer | 10 |

Tools Needed

- Measuring Tape
- Marker
- Drill
- 11/32" ~ .34" Drill Bit
- 1/2" Wrench - 2

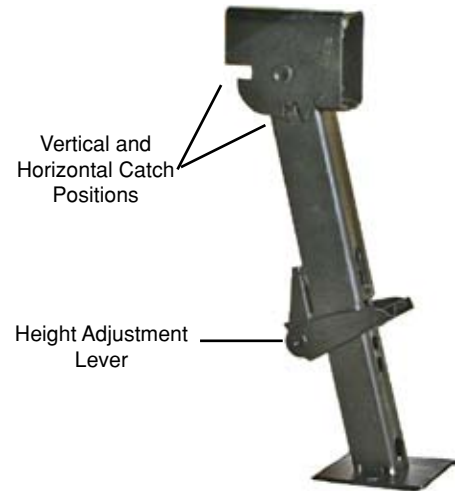

Assembly

1. At the end of the trailer locate the two frames tubes under it. Each frame tube has one pre-drilled hole on each end.



2. The Jack has two holes in the housing which are 3 inches apart. From the pre-drilled hole measure 3" on the frame tube and mark the spot. Do this for both the frame tubes. To be sure of the marked distance, verify by repositioning the jack on the frame tube.




3. Using your Drill with 0.34125" drill bit, drill hole in the marked spot.

4. On the drilled hole a washer needs to be sandwiched between the frame tube and the Jack. This ensures ample clearance when folded up.

Install Nuts, Bolts and Washers. This assembly will have a washer between the bolt and the jack as well as a washer between the frame tube and the nut. The bolt inserts through the jack.

Tighten firmly with wrench.

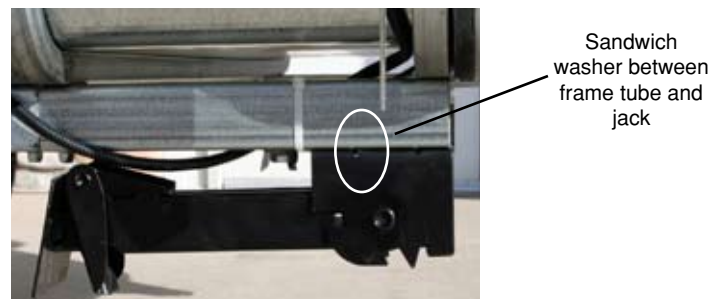

Leveler Assembly Kit

Operation

To extend legs, pull leg outwards to release the spring catch and detent lance. Allow the leg to swing downwards until the lance engages in the extended slot position.

To retract the legs, first minimize the leg length to the shortest position, then pull the leg downward to release the lance from its extended and locked position. Swing the leg upward into the retracted position until the lance catches in the retracted slot. Before driving, verify that the legs are retracted and that the locking lance is fully engaged in the locking slot.



1. To release from catch position, pull leveler forward (toward front of the trailer).



2. Swing Leveler down.



3. Adjust height by pressing downward on adjustment lever.

To prepare for transit, release adjustment lever to minimize leg length and fold upward to retract, caught position shown above.



WARNING

Always fold up Leveler Kit in secure position before operating trailer. To prevent damage, do not move trailer with stabilizers down.

For Assistance, contact Let's Go Aero at 877-464-2376 or 719-630-3800, or Support@LetsGoAero.com.

Visit our website at www.LetsGoAero.com

LET'S GO AERO
Gear Management Solutions